


716 Woven Aramid Tape

Technical Data Sheet

716

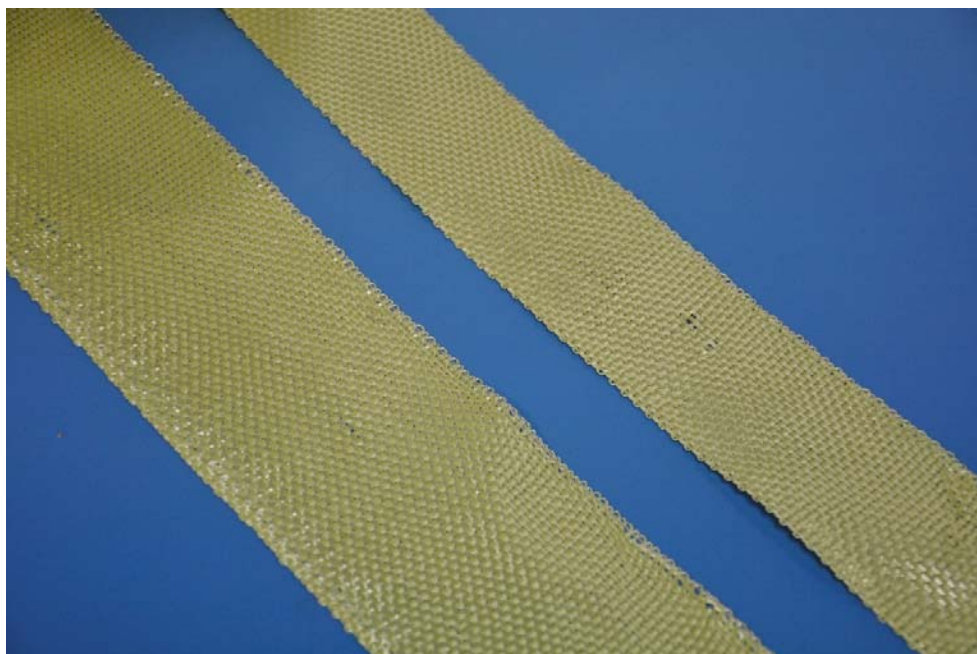

General Description

Aramid fabric provides excellent abrasive and tear resistance in addition to good impact resistance due to its ability to absorb and dissipate energy. Woven aramid tape is excellent for providing extra strength in localised high wear areas such as canoe and kayak keel lines, etc. 0.39mm thickness. Available in 50mm and 75mm widths.

716-5 5m of 75mm wide 200g/m² Plain Weave Aramid Tape

716-10 10m of 75mm wide 200g/m² Plain Weave Aramid Tape

716-50 50m of 75mm wide 200g/m² Plain Weave Aramid Tape

Characteristics

Width	75mm
Weight	200g/m ²
Fibre Orientation	0°/90°
Warp	50%
Weft	50%
Approximate thickness.....	0.39mm
Cured Appearance	Yellow
Ends cm	6.00
Picks cm	4.00
Warp Fibre	Kevlar 185
Weft Fibre.....	Kevlar 185

West System International
Cupernham House
Cupernham Lane
Romsey, Hampshire
SO51 7LF, UK

+44(0)1794 521111

westsystem.co.uk

ISO9001:2008 Certified

REV 1 / Nov, 2016

These are typical properties and cannot be construed as a specification. The end users should test the products to ensure the products are suitable for the intended application. Any information, data, advice or recommendation published by Wessex Resins by other means and whether relating to Wessex Resins' materials or other materials, is given in good faith and believed to be reliable.