



Technical Data

LAM-125G

LAM-249-HT

BIOBASED HIGH T_g LAMINATING EPOXY

The New Standard

EPOXIES for Laminating Infusion Tooling Assembly

Wessex Resins & Adhesives
Cupernham House
Cupernham Lane
Romsey, Hampshire
SO51 7LF, UK
pro-set.co.uk
+44(0)1794 521111

ISO9001:2015 Certified

REV 2 / July 2023

©2023 Wessex Resins & Adhesives

COMBINED FEATURES

Low viscosity for quick wet out of synthetic composite fabrics; especially effective with Kevlar® and carbon fibre.

Medium cure speed hardener provides 2 to 3 hours of working time at 25°C. A typical laminate will be gelled in 8 hours.

Optimised for hand wet out and machine impregnation in contact moulding, vacuum bagging and Light RTM applications.

Elevated temperature cure is required; thermal and mechanical properties suitable for composite components and high temperature tooling and moulds

T_g as high as 121°C with proper post cure providing excellent temperature stability and great part cosmetics.

Cost effective, high performance epoxy formulation for synthetic composite manufacturing.

The biobased content of PRO-SET LAM-125G resin is 34% as measured according to the ASTM D6866-18 test method.

HANDLING PROPERTIES

Property	Standard	Units	22°C
150g Pot Life	ASTM D2471	minutes	85
500g Pot Life	ASTM D2471	minutes	67
Viscosity Mixed	ASTM D2196	mPas	589
Viscosity (resin)	ASTM D2196	mPas	1420
Viscosity (hardener)	ASTM D2196	mPas	28


MIX RATIO

Method	Resin:Hardener	Resin:Hardener
Weight	3.57:1	100:28
Volume	3.00:1	100:33.3

DENSITY

State	Units	22°C
Cured	gcm ⁻³	1.07
Resin	gcm ⁻³	1.15
Hardener	gcm ⁻³	0.96

VISCOSITY VS TEMPERATURE

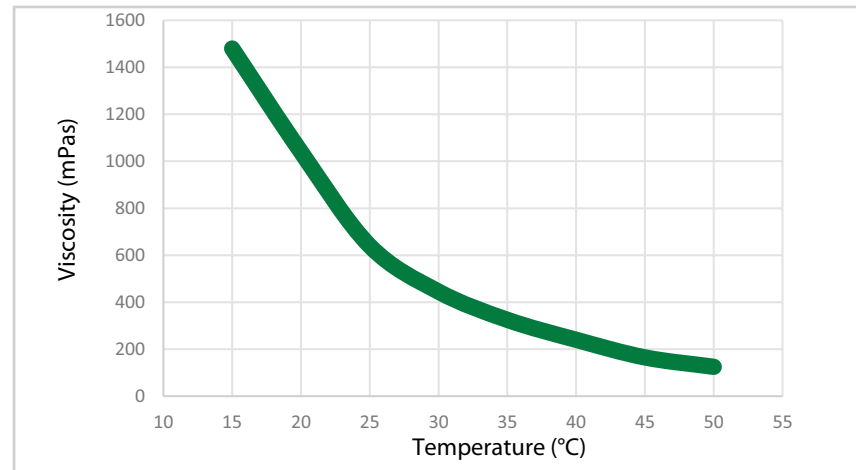

Test specimens were neat epoxy (without fibre reinforcement). Typical values not to be construed as specification.

LAM-125G / LAM-249-HT

BIOBASED HIGH T_g LAMINATING EPOXY

MECHANICAL PROPERTIES

Property	Standard	Units	RT Gelation + 60°C x 8 hrs	RT Gelation + 121°C x 8 hrs
Hardness	ASTM D2240	Shore D	85	86
Compression Yield	ASTM D695	MPa	118	109
Tensile Strength	ASTM D638	MPa	79.7	79.9
Tensile Modulus	ASTM D638	GPa	3.26	3.10
Tensile Elongation	ASTM D638	%	3.33	6.10
Flexural Strength	ASTM D790	MPa	128	114
Flexural Modulus	ASTM D790	GPa	3.00	2.95

THERMAL PROPERTIES

Property	Standard	Units	RT Gelation + 60°C x 8 hrs	RT Gelation + 121°C x 8 hrs
T _g DMA Peak Tan Delta	ASTM E1640*1	°C	95.4	129.9
T _g DSC Onset - 1st Heat	ASTM E1356	°C	83.1	121.0
T _g DSC Ultimate	ASTM E1356	°C	126.8	129.1

*1 1Hz, 3°C per minute.

*2 Additional post cure may be required; contact Technical Department for details.

Test specimens were neat epoxy (without fibre reinforcement).

These are typical properties and cannot be construed as a specification. The end users should test the products to ensure the products are suitable for the intended application. Any information, data, advice or recommendation published by Wessex Resins or obtained from Wessex Resins by other means and whether relating to Wessex Resins' materials or other materials, is given in good faith and believed to be reliable.

REV 2 / July 2023